
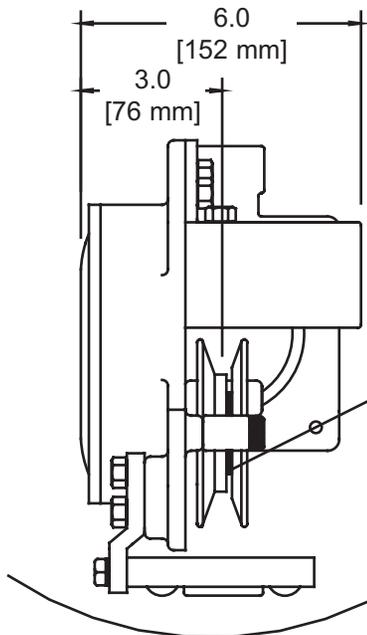
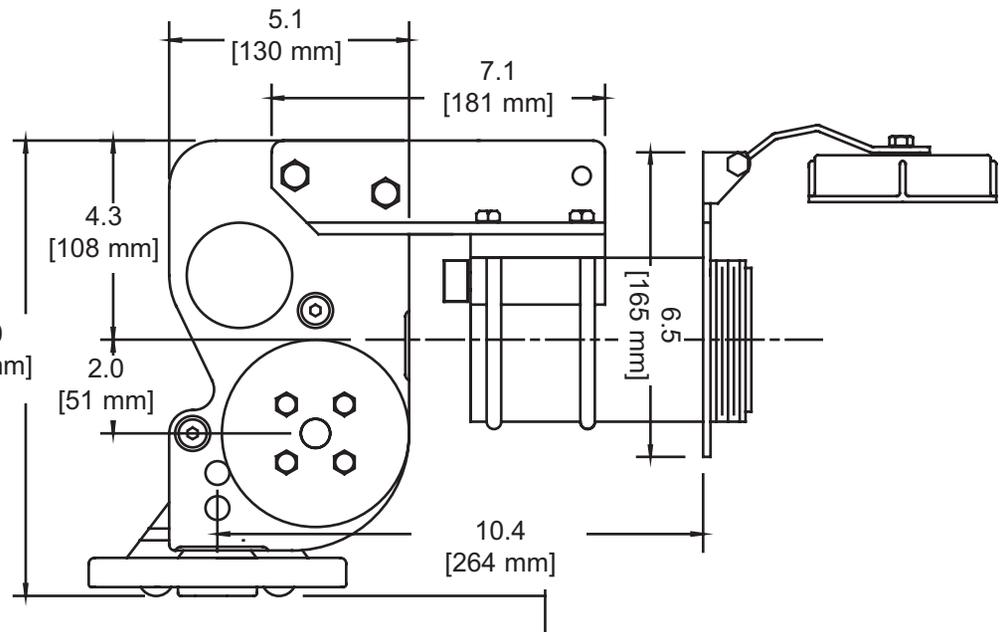


CM-4 DIMENSIONS

SPECIFICATIONS:

Voltage: 12 VDC
 Current: 4 - 5 Amps under load
 Weight: 9 lbs.
 Cable size: 30 amp, 110 volt
 Adjustable (5/8" to 3/4"
 diameter)
 Length capacity: Determined by size of storage
 location

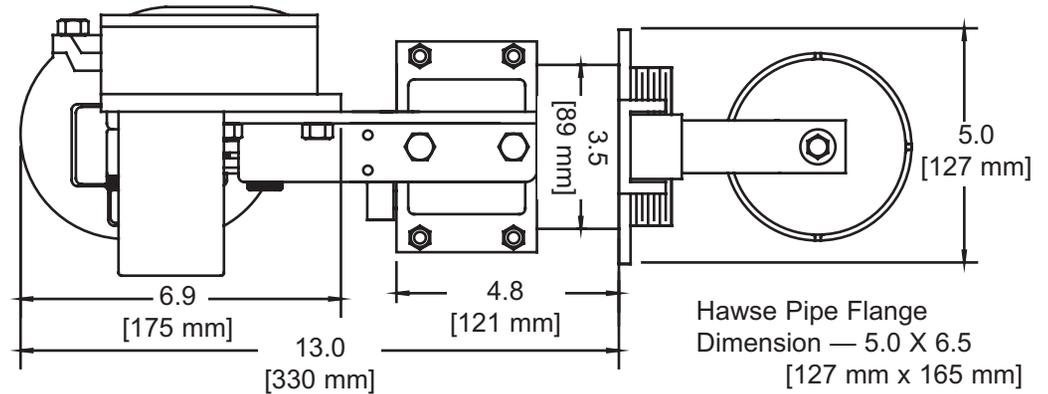

NOTE: Spacers provided for variable cable diameter adjustment

NOTE: Power Unit may swing up to 45 degrees

Minimum cable area required for 50 feet of 50 amp shore power cable is 18" diameter X 18" high (centered under Guide Roller Assembly)

CM-4 DIMENSIONS

The CM-4 Standard Configuration comes complete with:

- Power Unit
- Chromed Hawse Pipe Assembly
- Out-limit and In-limit switch assembly
- Power switch (3 pos. out-off-in)
- Nameplate
- One year limited warranty

Optional Configuration includes:

- 50 feet of 30amp cable
- Storage Container

Common Installation Accessories:


- 10amp breaker
- Extra bracketing available



GLENDINNING
MARINE PRODUCTS, INC.

740 Century Circle
Conway, SC 29526
P: 843.399.6146
F: 843-399-5005

www.glendinningprods.com CM4D_v2.0

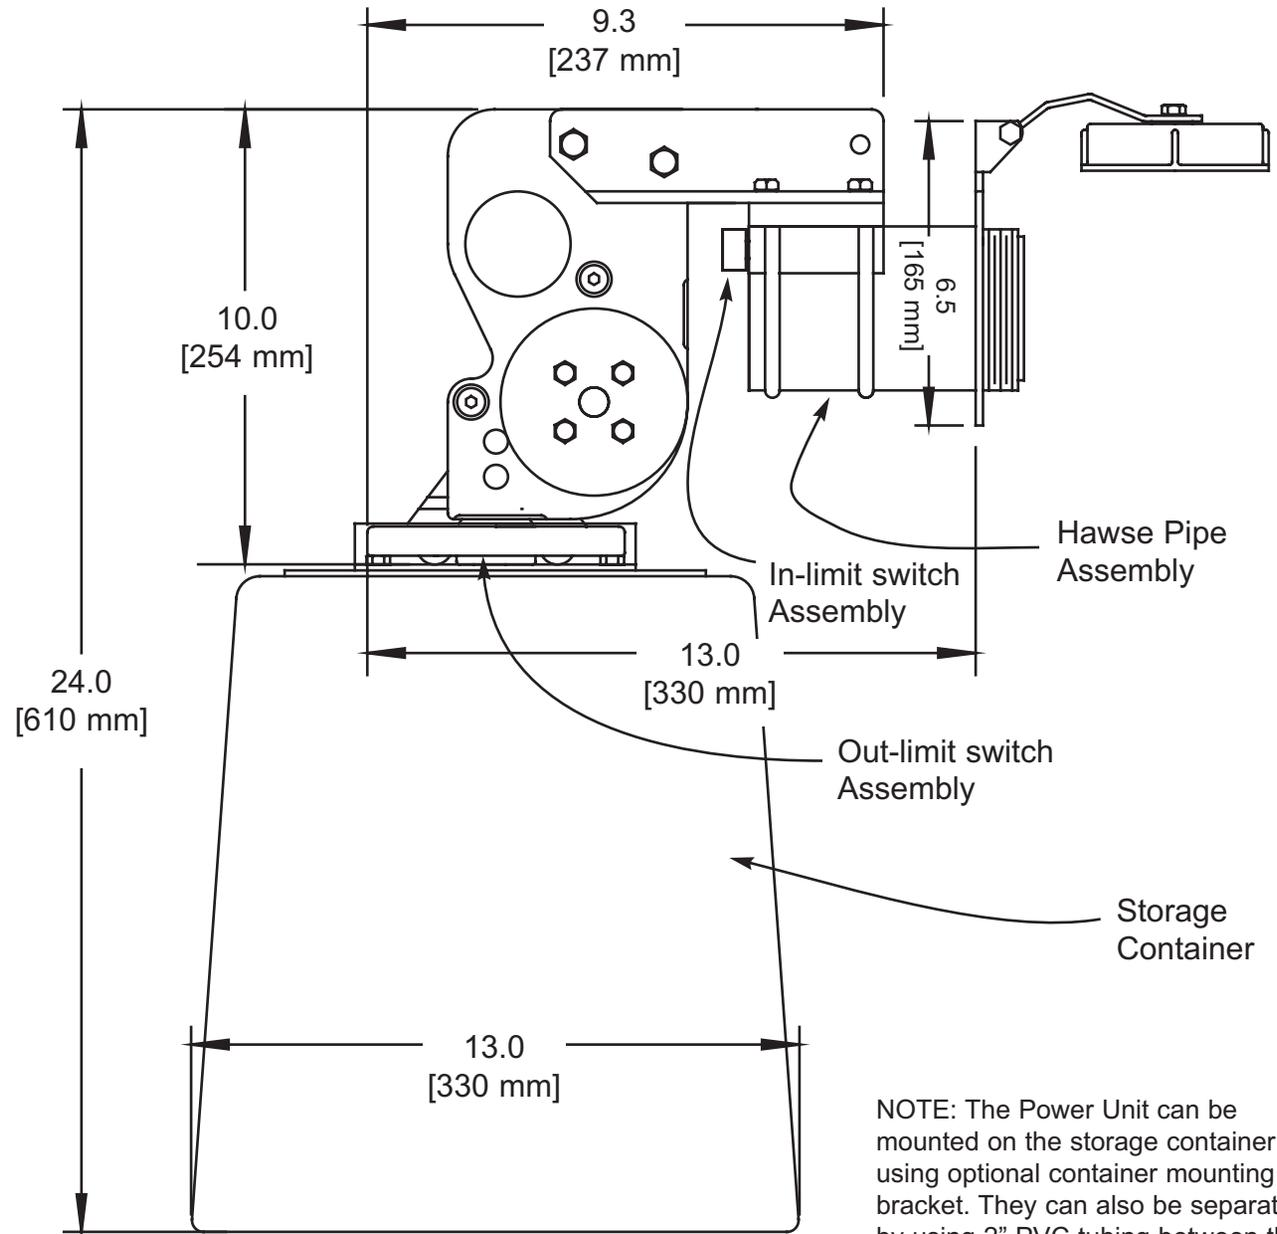

NOTE: The Power Unit can be mounted on the storage container using optional container mounting bracket. They can also be separated by using 2" PVC tubing between the Container and Power Unit.