

Hosemaster™

Powered Hose Reel Systems



Glendinning Hosemaster™ systems put an end to fighting with tangled, twisted and often dirty water hoses.

With Glendinning Hosemaster installed, washing down decks has never been easier. Both 12 or 24v versions are available supplied with various hose diameters and lengths to suit your application.

Extremely robust marine construction using anodized aluminum, stainless steel and plastic polymer components means you can be sure of their suitability for life in the harshest of environments.

All units feature Glendinnings innovative clutch mechanism, allowing you to effortlessly pull off the amount of hose required, then to retract it, push and hold the control switch and the hose will be retracted and stored on the reel ready for the next time it's required!

"ZERO EFFORT" PULL OUT FORCE

Patented drive motor mechanism remains completely disengaged while the hose is being extended.

EFFICIENT STORAGE

No more trying to coil and uncoil uncooperative hoses, hose is stored neatly on its reel.

EASY INSTALLATION

Supplied ready to install in any free space onboard (floor, deck head or bulkhead mount).

LEVELWIND FEATURE

Hosemaster LW models feature Glendinnings "levelwind" device that insure the hose is loaded onto the reel neatly allowing upto 100ft (30m) of 1/2" (12mm) hose to be stored in a very compact area.

Relax... we're onboard!



Glendinning Products, LLC.

740 Century Circle, Conway, SC 29526-8274

t: +1 (843) 399-6146 | e: info@glendinningprods.com | f: +1 (843) 399-5005



www.glendinningprods.com



Hosemaster™



Powered Hose Reel Systems

Model-M Specifications

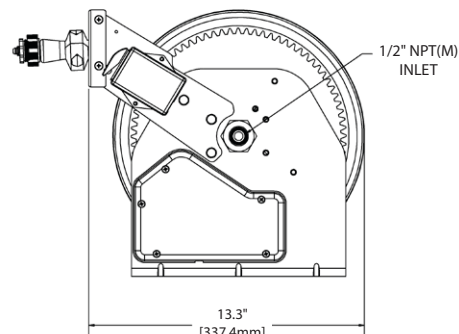

Model	Part Number	Description	Voltage (DC)	Hose ID	Hose Length	Current	Weight
Hosemaster-M	05510-12-35	Hosemaster-1/2" 12V 35'	12v	1/2" (12mm)	35ft (10.7m)	3 amps	16lbs (7.3kg)
	05510-24-35	Hosemaster-1/2" 24V 35'	24v	1/2" (12mm)	35ft (10.7m)	2 amps	16lbs (7.3kg)
	05510-12-50	Hosemaster-1/2" 12V 50'	12v	1/2" (12mm)	50ft (15.2m)	3 amps	18lbs (8.2kg)
	05510-24-50	Hosemaster-1/2" 24V 50'	24v	1/2" (12mm)	50ft (15.2m)	2 amps	18lbs (8.2kg)
	05511-12-35	Hosemaster- 5/8" 12V 35'	12v	5/8" (15.9mm)	35ft (10.7m)	3 amps	18lbs (8.2kg)
	05511-24-35	Hosemaster- 5/8" 24V 35"	24v	5/8" (15.9mm)	35ft (10.7m)	2 amps	18lbs (8.2kg)

Model-LW Specifications

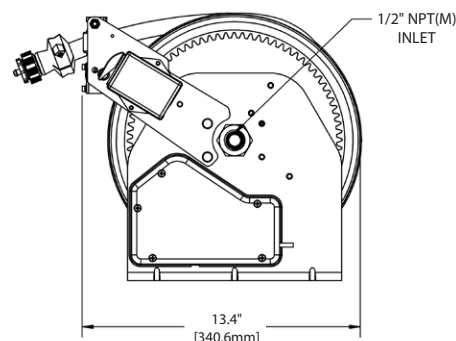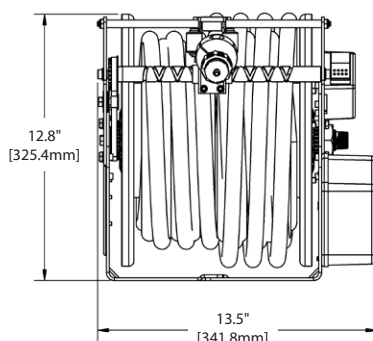

Model	Part Number	Description	Voltage (DC)	Hose ID	Hose Length	Current	Weight
Hosemaster-LW	05520-12-75	Hosemaster - 5/8" 12V 75' LW	12v	5/8" (15.9mm)	75ft (22.9m)	3-4 amps	27 lbs. (12.2kg)
	05520-24-75	Hosemaster - 5/8" 24V 75' LW	24v	5/8" (15.9mm)	75ft (22.9m)	2-3 amps	27 lbs. (12.2kg)
	05520-12-100	Hosemaster - 1 /2" 12V 100' LW	12v	1/2" (12mm)	100ft (30.5m)	3-4 amps	27 lbs. (12.2kg)
	05520-24-100	Hosemaster - 1/2" 24V 100' LW	24v	1/2" (12mm)	100ft (30.5m)	2-3 amps	27 lbs. (12.2kg)

Additional Specifications

Hose Type	White, non marking, drinking water safe hose
Material	Anodized Aluminum, stainless steel and plastic polymers
Water Connection Inlet	1/2" NPT
Approvals	CE, ISO8846, NSF61, ABYC

For more information contact our sales engineer or your local Glendinning dealer today!

Glendinning Products, LLC.

740 Century Circle, Conway, SC 29526-8274

t: +1 (843) 399-6146 | e: info@glendinningprods.com | f: +1 (843) 399-5005

www.glendinningprods.com

